




Dimmable TRIAC constant current driver 25-42V 12.6W 300mA

Ref. PE294R4230

Driver Triac dimmable CC 25-42V 300mA ✓ PRI: 200V-250V ✓ SEC: 25-42VDC ✓ 12.6W ✓ PF: 0.9 ✓ 50/60hz ✓ 104x39x26mm

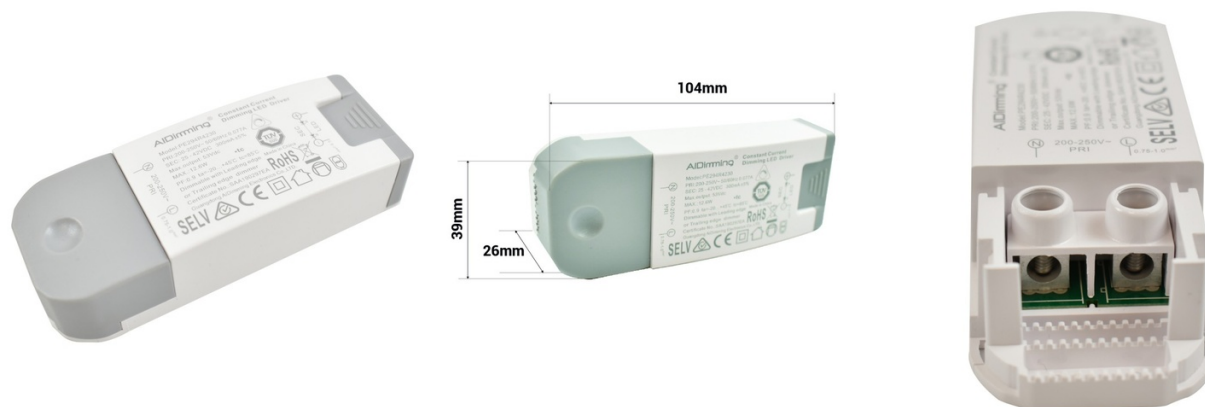

Product data

Certificaten	CE, ROHS
Erausgangsstrom mA	300mA
Dimensiounen (mm) LxIxh	104x39x26mm
dimmbars	Jo
Leedungsfaktor (cosφ)	0.9
Frequenz (Hz)	50 - 60
Material	Plastik
Maximal Leeschtung (W)	12.6
Temperaturbereich	-20°C ~ +45°C
Ausgangsspannung (V)	25 - 42
Nummspannung (V)	200 - 250 V



Product variants

Reference

Attributes



PE294R4230