


Mechanical Structures and Installations

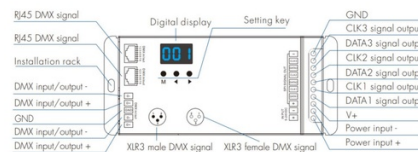


DMX512 to SPI Pixel Decoder - 5-24V DC - RF Controller

Ref. SK-DSA

De DMX512 op SPI LED Decoder konvertiert DMX-Signaler an SPI-Signaler fir smart oder digital RGB oder RGBW LED Sträifen ze steieren. Et fonctionnéiert och als RF Controller, wat et lech erméiglecht et mat engem 2,4GHz RF Fernsteuerung ze paaren fir praktesch a drahtlos Kontrollen. Et huet e digitale Bildschirm an ass kompatibel mat villen Typen vu LED IC Chips. Et erlaabt lech, eng breet Varietétéit un impressiv a personaliséierte Liichtefferter fir Är Projeten ze kreéieren.


Wiring Diagram

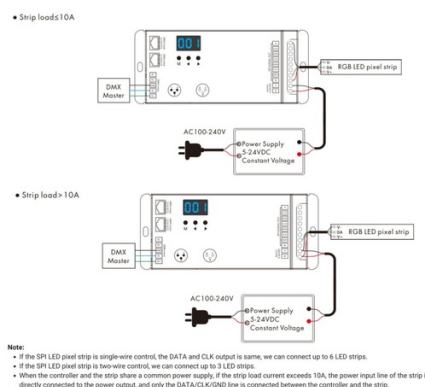

Product data

Certificaten	CE, ROHS
Verbindung	RF, DMX
Faarfkontroll	RGB, RGBW
Dimensiounen (mm) LxIxxh	165 x 70 x 37
Garantie	5 Joer
IP	IP20
Temperaturbereich	-30°C ~ +55°C
Nummspannung (V)	5-24V
Uwendung am Freien	Nei

Mechanical Structures and Installations

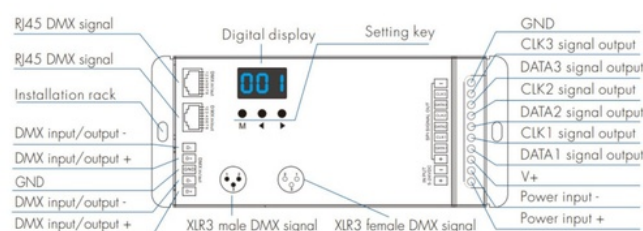

Product variants

Reference

Attributes



SK-DSA