



Mechanical Structures and Installations

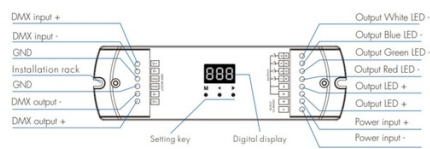

DMX512 Decoder 12-48V DC - 350-1200mA/channel - 4 Channels


Ref. SK-D4C-L

De DMX512 Dekoder ass e LED Luuchten Kontrollgeräter mat 4 ouput Kanäl mat enger Spanne vun 150-1200mA pro Kanal. Et ass kompatibel mat Input-Spannungen vun 12-48V. Benutzt den DMX512 Entrée-Signal a gitt e PWM Ausgaassignal fir eng glat Lighting Kontroll ze erreechen. Ënnerstëtzt RDM Fernsteuerung, erlaabt d'Auswiel vun der Ausgangsresoluzioun an PMW Frequenzjusteierung.



Product data

Certificaten	CE, ROHS
Verbindung	DMX
Faarfkontroll	RGB, RGBW
Dimensiounen (mm) LxIxh	170 x 50 x 23
Garantie	5 Joer
Maximal Intensitéit (A)	0,35 - 1,2
IP	IP20
Zuel vun Kanäl	4
Temperaturbereich	-30°C ~ +55°C
Nummspannung (V)	12-48V
Uwendung am Freien	Nei

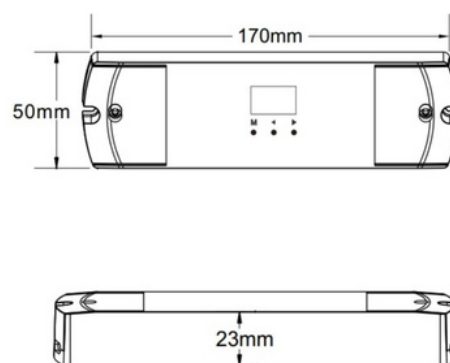

Product variants

Reference

Attributes



SK-D4C-L