




Safety and EMC	
EMC standard (EMC)	ETSI EN 301 489-1 V2.2.3 ETSI EN 301 489-17 V3.2.4
Safety standard	EN 62368-1:2020+A11:2020
Radio Equipment(RED)	ETSI EN 300 328 V2.2.2
Certification	CE,EMC,RED



RGB+CCT Controller 12-48V DC - 25A (5A/channel) - RF 2.4G - PUSH dimmer - Skydance

Ref. SK-V5


RGB + CCT Controller mat 3 Kanäl fir LED Luminaires vu 12-48V. Et huet 10 vordefiniert dynamesch Modus. Gitt eng glat Dimmen vun 0 bis 100% ouni Flimieren an ass kompatibel mat 2.4G RF Skydance Fernsëcherungen. Et ass justéierbar duerch PUSH. Et huet eng "Auto-Transmissioun" an "Auto-Synchronisatioun" Funktioun, déi et erlaabt Signaler un aner Controller ze schécken an se ze synchroniséieren wann se vum selwechten Remote kontrolléiert ginn.

Mechanical Structures and Installations



Product data

Certificaten	CE, ROHS
Verbindung	RF
Faarfkontroll	RGB+CCT
Dimensiounen (mm) LxIxh	175 X 45 X 27
Kontrolldistanz	30m
Garantie	5 Joer
Maximal Intensitéit (A)	5A/CH: 12-24V 4A/CH:36-48V
IP	IP20
Zuel vun Kanäl	5
Leistung (W)	5 x 60 :12V 5 x 120:24V 5 x144:36V 5 x 192:48V
Nummspannung (V)	12-48VDC
Uwendung am Freien	Nei

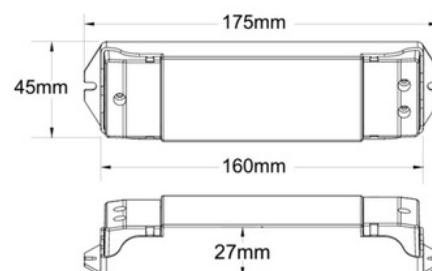

Product variants

Reference

Attributes



SK-V5