



Commercial LED Campagne CCT - (25W / 40W / 60W / 80W) - Polycarbonat Diffusor - UGR19 - Lifud Treiber


Ref. B8850-PC-CCT

Kommerziell CCT LED High Bay Luucht mat ajustierter Kraaft (25W / 40W / 60W / 80W) a kloer Polycarbonat Diffusor. Et bitt héichqualitativ Beleuchtung mat CRI>80 an minimale Blendung (UGR<19), wat maximalen visuellen Komfort garantéiert. Verstellbar Faarftemperatur (3000K / 4000K). E speziell fir Geschäfte a kommerziell Plazen entwéckelt, verbessert et Är Produkter mat aussergewöhnlecher Beleuchtung.



Product data

Wäit	Ø325mm
Winkelope (°)	90°
Certificaten	CE, ROHS
Klasse énérgéiert Effizient	C
CRI	75-80
dimmbar	Jo
Fuerer	Intern, Lifud
Effizienz (Lm/w)	140
Leedungsfaktor (cosφ)	0.9
Frequenz (Hz)	50 - 60
Benutzungsfrequenz	normal
Garantie	5 Joer
IP	IP40
Kelvin (K)	4000, 5000
Léngt	460mm
Lumen (Lm)	elef tauend zwéin hunnerte
Material	Aluminium
Material Diffusor	Polycarbonat
Montage	Suspensioun
Orientéierbar	Nei
Leistung (W)	25, 40, 60, 80
Temperaturbereich	-20°C ~ +40°C

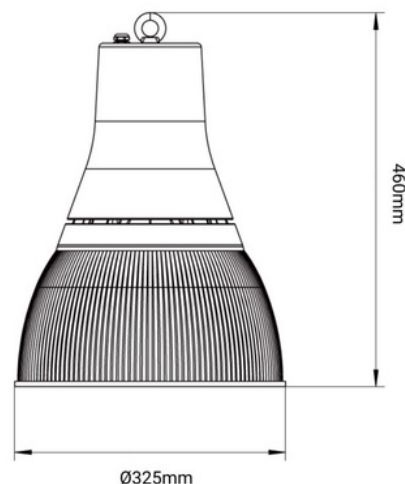

Sensor	Neen
Kontrollsystem	0-10V
Nummspannung (V)	100 - 265V
Tonalitéit	CCT
Uwendung am Freien	Nei
Recomandéiert Benotzung	Handel
Letztenzäit (h)	f💡💡💡nfundzég tausend

Product variants

Reference

Attributes

B8850-PC-CCT

