

Adjustable RF PUSH driver 8-48V 50W multicurrent (250-1500mA) - Perfect RF


Ref. SRP-1009-50CC

SRP-1009-50CC yra 50W reguliuojamas LED maitinimo šaltinis su nuolatine srovės išvestimi 1 kanalu ir reguliuojama srove nuo 250mA iki 1500mA per DIP jungiklius, skirtus skirtingoms nuolatinėms srovėms. Jis sukurtas su įėjimo įtampa 200 - 240V. Maitinimo šaltinio galios faktorius gali būti didesnis nei 0.9, o efektyvumas viršija 87%. Jis leidžia sklandų ir gilų reguliavimą iki 0.1% be mirgėjimo ar užimo. LED maitinimo šaltinis sukurtas su RF valdymo sąsaja ir gali būti suderinamas su įvairiomis RF nuotolinio valdymo pulteliais. Šis maitinimo šaltinis yra iš Sunricher prekės ženklo Perfect RF kategorijoje.

Output	Selectable Current	250mA	300mA	350mA	400mA	450mA	500mA	600mA	700mA
	DC Voltage Range	8-48V	8-48V	8-48V	8-48V	8-48V	8-48V	8-48V	8-48V
Output	Selectable Current	800mA	900mA	1000mA	1100mA	1200mA	1300mA	1400mA	1500mA
	DC Voltage Range	8-48V	8-48V	8-48V	8-48V	8-41V	8-38V	8-35V	8-33V
Input	Rated Power	50W							
	Voltage Range	200-240V AC							
	Frequency	50/60Hz							
	Power Factor (Typ.)	>0.9							
	Efficiency (Typ.)	87% @ 230VAC							
	Input Current (Typ.)	0.27A @ 230VAC							
Protection	Inrush Current (Typ.)	COLD START Max. 2A at 230VAC							
	Short Circuit	Yes, auto recovery after fault removed							
	Over Voltage	Yes, auto recovery after fault removed							
	Over Temperature	Yes, auto recovery after fault removed							
Environment	Working Temp.	-20°C ~ +45°C							
	Max. Case Temp.	85°C							
	Working Humidity	10% ~ 95% RH non-condensing							
Storage Temp. & Humidity		-40°C ~ +85°C, 10% ~ 95% RH							

Product data

Certifikatai	CE, ROHS
Garantija	5 metai

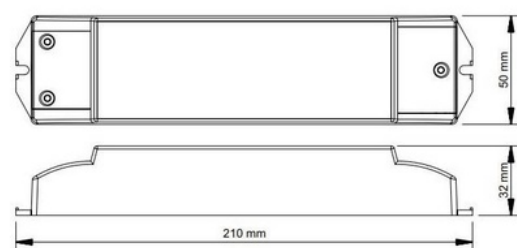

Product variants

Reference

Attributes



SRP-1009-50CC