


DMX512 Decoder 12-24V DC - 5A/channel - 12 Channels - OLED Display

Ref. SK-D12A

DMX512 dekodėris yra LED apšvietimo valdymo įrenginys su 12 išėjimo kanalų, kiekvienas su maksimalia intensyvumo verte 5A. Jis yra suderinamas su 12-24V įtampa. Jame yra OLED ekranas ir mygtukai, skirti pasirinkti pradinę DMX adresą. Naudokite DMX512 įėjimo signalą ir pateikite PWM išėjimo signalą, kad pasiektumėte sklandų apšvietimo valdymą.

WIRING DIAGRAM




Note:

1. Connecting with green terminal (DMX AMP) or an extra amplifier will be needed when more than 32 decoders are connected, or use overlong signal line, signal amplification should not be more than 5 times continuously.
2. If the recoil effect occurs because of longer signal line or bad line quality, please try to connect 0.25W 90-120Ω terminal resistor at the end of each DMX signal line.

Product data

Certifikatai	CE, ROHS
Matmenys (mm) LxHx	246 x 116 x 38.5
Garantija	5 metai
Didžiausia intensyvumas (A)	5A/kanalas
IP	IP20
Kanalo numeris	12
Išėjimo įtampa (V)	12 - 24
Nominali įtampa (V)	12-24V DC
Naudojimas lauke	Ne

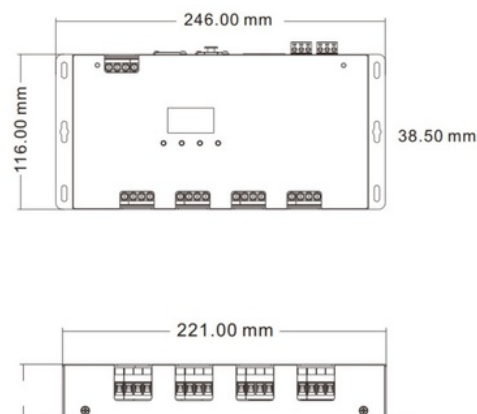

Product variants

Reference

Attributes



SK-D12A