

100lm/W
Alta eficiencia
High efficiency
Haute efficacité



20W




LED downlight okrogel vgradni 20W - Premer Ø190mm

20W vgrajena okrogla LED svetilka, z zunanjim premerom 217mm in globino 25.7mm. Izdelan iz belega polikarbonata, zagotavlja učinkovito osvetlitev brez elektromagnetnega šuma, kar je idealno za notranje prostore. Premer rezanja: Ø190mm.

Product data

T° svetlobe	3000°K (uporabiti), 4000°K (uporabiti), 6000K (uporabiti)
Potrdila	CE, ROHS
Razred energetske učinkovitosti	A+ (2021)
CRI	80-85
Dimenzije (mm) LxIxh	Ø217x 25,7 mm
Dimenzije rezanja (mm)	Ø185-190mm
Prilagodljivo	Ne
Učinkovitost (Lm/w)	100
Oblika	Krožno
Frekvenca uporabe	normalno
Garancija	Po zakonski garanciji: 3 leta
IP	IP20
Kelvin (K)	3000, 4000, 6000
Lumeni (Lm)	2000
Material	Polikarbonat
Material difuzor	Polikarbonat
Montiranje	Vgrajen
Usmerljiv	Ne
Temperaturni razpon	-20°C ~ +40°C
Nomin Spannung (V)	230
Vrsta LED	SMD 2835
Tonaliteta	Topla bela, Bela hladnost, Bela nevtralna

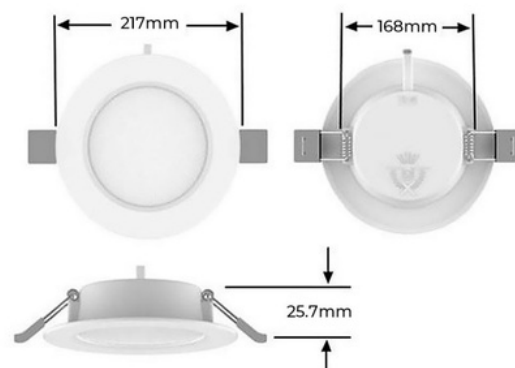

Zunanja raba	Ne
Priporočena uporaba	Kuhinje
Življenjska doba (h)	25000

Product variants

Reference	Attributes	
B1242-B-20W-BC	T° svetlobe : 3000°K (uporabiti)	 100lm/W Alta eficiencia High efficiency Haute efficacité LED 20W
B1242-B-20W-BF	T° svetlobe : 6000K (uporabiti)	 100lm/W Alta eficiencia High efficiency Haute efficacité LED 20W
B1242-B-20W-BN	T° svetlobe : 4000°K (uporabiti)	 100lm/W Alta eficiencia High efficiency Haute efficacité LED 20W