



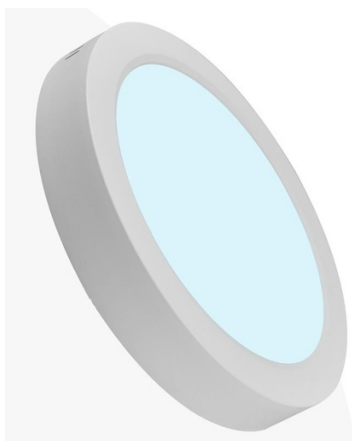

24W
CRI >80

- LED
- U20
- 100 lm/W
- CHIP SMD 2835

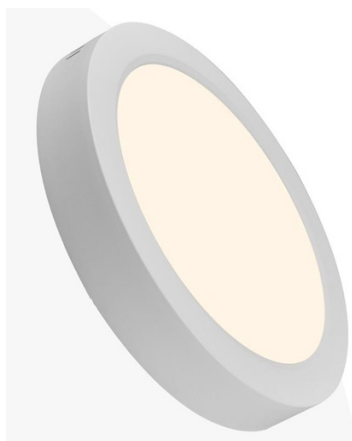


24W
CRI >80

- LED
- U20
- 100 lm/W
- CHIP SMD 2835




LED stropna svetilka 24W Visoka Učinkovitost

Stropna LED svetilka s površinsko montažo in močjo 24W. Minimalističen dizajn z dimenzijami Ø289x38mm. Ohišje je izdelano iz polikarbonata z belo površinsko obdelavo. Opalni difuzor iz polikarbonata za homogeno in intenzivno svetlobo. Zaradi DOB tehnologije ta LED stropna svetilka ponuja visoko učinkovitost z 100lm/W, nizko porabo ter brez utripanja in hrupa. Kota žarčenja znaša 120 stopinj. LED svetilka idealna za tako profesionalce kot posameznike. Popolno osvetlitev, ki združuje odlično učinkovitost s kompaktno zasnovo za vsak notranji prostor.

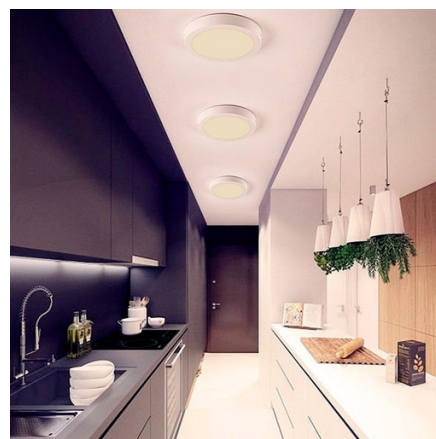


Product data

T° svetlobe	3000°K (uporabiti), 4000°K (uporabiti), 6000K (uporabiti)
Potrdila	CE, ROHS
Razred energetske učinkovitosti	A+ (2021)
CRI	80-85
Prilagodljivo	Ne
Učinkovitost (Lm/w)	100
Oblika	Krožno
Frekvenca uporabe	normalno
IP	IP20
Kelvin (K)	4000, 6000
Material	Polikarbonat
Material difuzor	Polikarbonat
Montiranje	Površina
Usmerljiv	Ne
Vrsta LED	SMD 2835
Tonaliteta	Bela hladnost, Bela nevtralna
Zunanja raba	Ne
Življenjska doba (h)	25000

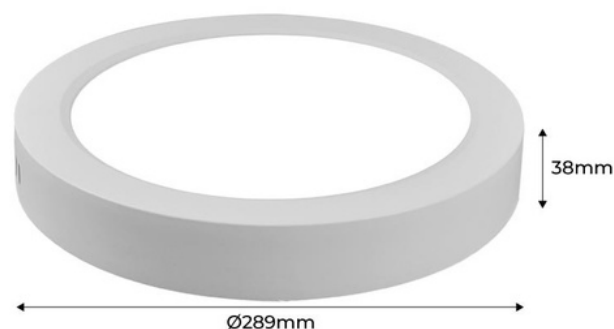

Product variants

Reference	Attributes	
B1230-B-24W-BC	T° svetlobe : 3000°K (uporabiti)	 24W CRI >80 IP65 2000h 2000h 2000h 2000h 2000h 2000h
B1230-B-24W-BF	T° svetlobe : 6000K (uporabiti)	 24W CRI >80 IP65 2000h 2000h 2000h 2000h 2000h 2000h
B1230-B-24W-BN	T° svetlobe : 4000°K (uporabiti)	 24W CRI >80 IP65 2000h 2000h 2000h 2000h 2000h 2000h