




Safety and EMC	
EMC standard (EMC)	ETSI EN 301 489-1 V2.2.3 ETSI EN 301 489-17 V3.2.4
Safety standard	EN 62368-1:2020+A11:2020
Radio Equipment(RED)	ETSI EN 300 328 V2.2.2
Certification	CE,EMC,RED



RGB+CCT Controller 12-48V DC - 25A (5A/channel) - RF 2.4G - PUSH dimmer - Skydance

Ref. SK-V5


RGB + CCT krmilnik s 3 kanali za LED svetila 12-48V. Značilnost je 10 prednastavljenih dinamičnih načinov. Ponuja gladko zatemnitev od 0 do 100% brez utripanja in je združljiv z 2.4G RF Skydance daljinskimi upravljalniki. To je nastavljivo s PUSHEM. Imeti "avtomatski prenos" in "avtomatsko sinhronizacijo", kar omogoča pošiljanje signalov drugim krmilnikom in njihovo sinhronizacijo, ko jih nadzira ista daljinska upravljalna enota.

Mechanical Structures and Installations



Product data

Potrdila	CE, ROHS
Konektivnost	RF
Barvna kontrola	RGB+CCT
Dimenzije (mm) LxIxh	175 X 45 X 27
Kontrolna razdalja	30m
Garancija	5 let
NajvečjaIntenzivnost (A)	5A/CH: 12-24V 4A/CH:36-48V
IP	IP20
Število kanalov	5
Moč (W)	5 x 60 :12V 5 x 120:24V 5 x144:36V 5 x 192:48V
Nomin Spannung (V)	12-48VDC
Zunanja raba	Ne

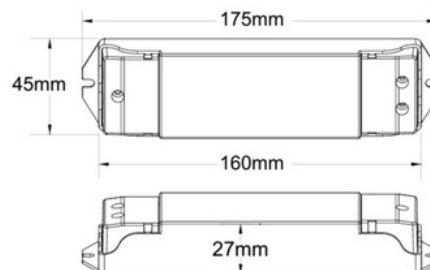

Product variants

Reference	Attributes
SK-V5	