



Safety and EMC	
EMC standard (EMC)	ETSI EN 301 489-1 V2.2.3 ETSI EN 301 489-17 V3.2.4
Safety standard	EN 61348-1:2015+A1:2021 EN 61348-2-13:2014+A1:2017
Radio Equipment(RED)	ETSI EN 300 328 V2.2.2
Certification	CE, EMC, RED



CCT Controller - 12-24V DC - 2 channels - 5A/channel - RF 2.4GHz - Skydance


Ref. SK-V2

2-kanalni CCT krmlnik za LED svetila 12-24V. Nudi gladko zatemnjevanje od 0 do 100% brez utripanja in je združljiv z daljinskimi upravljalniki CCT RF 2.4GHz Skydance. Z avtomatskim prenosom in avtomatsko sinhronizacijo funkcijami, ki omogočajo učinkovito in sinhronizirano nadzorovanje.



Product data

Visoko	18mm
Širina	33mm
Konektivnost	RF
Barvna kontrola	Monokrom
Kontrolna razdalja	30m
Garancija	5 let
NajvečjaIntenzivnost (A)	5A/kanal
IP	IP20
Dolg	97mm
Število kanalov	2
Moč (W)	2 x (60-120W)
Temperaturni razpon	-30 °C ~ +55 °C
Izhodna napetost (V)	12-24VDC
Nomin Spannung (V)	12-24V DC
Zunanja raba	Ne

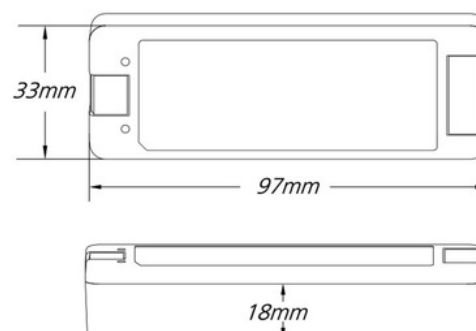

Product variants

Reference

Attributes

SK-V2

