


DMX512 Decoder 12-24V DC - 15A - 1 Channel

Ref. SK-D1-L

Decodifier DMX512 je uređaj za upravljanje LED rasvjetom s 1 izlaznim kanalom s maksimalnom snagom od 15A. Kompatibilan je s ulaznim naponom od 12-24V. Koristi DMX512 ulazni signal i pruža PWM izlazni signal za postizanje glatke kontrole osvjjetljenja. Podržava daljinsko upravljanje RDM, omogućava odabir izlazne rezolucije i podešavanje frekvencije PWM.



Wiring Diagram

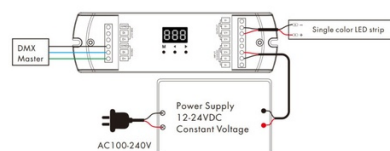

Note:
1. An DMX signal amplifier is needed if more than 32 decoders are connected, or use overlong signal line, signal amplification should not be more than 5 times continuously.
2. If the recoil effect occurs because of longer signal line or bad line quality, please try to connect 0.25W 90-120Ω terminal resistor at the end of each DMX signal line

Product data

Certifikati	CE, ROHS
Povezivost	DMX
Dimenzije (mm) LxIxh	170 x 50 x 23
Garancija	5 godina
maksimalna jačina (A)	15
IP	IP20
Broj kanala	1
Izlazni napon (V)	12 - 24 V
Nominalni Napon (V)	12-24V DC
Spoljna upotreba	Ne

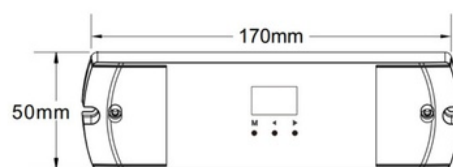

Product variants

Reference

Attributes



SK-D1-L