



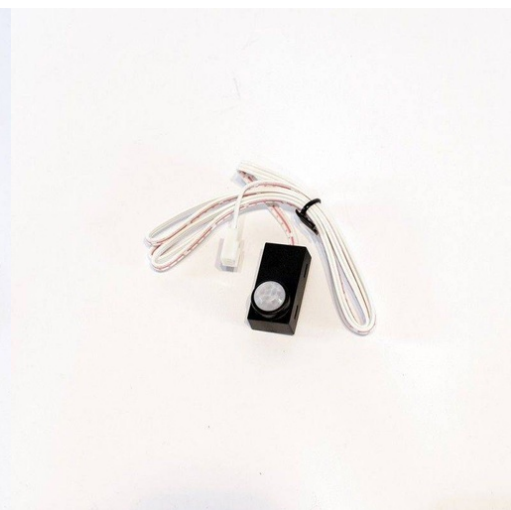

PIR motion sensor 12-36V-DC 8A 60° IP20

Ref. SR-8004DC

PiR senzor pokreta i detektor prisutnosti za LED trake, žarulje i niskonaponske svjetiljke (12-36V). Maksimalno opterećenje 288W (na 36W) i 8A. 96-288W - 8A 12-36VDC 95x37x20mm $\angle$ 60° $\leftrightarrow$ 0-3m PIR IP20

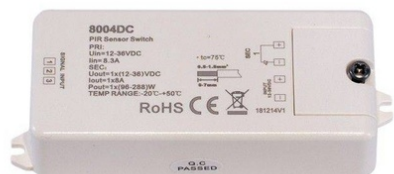

Product data

Kut detekcije (°)	60
Certifikati	CE, ROHS
Razred energetske učinkovitosti	A+ (2021)
Povezanost	PIR
Dimenzije (mm) LxIxh	95x37x20
Frekvencija korištenja	Intenzivno
Jamstvo	5 godina
Maximalna intenzivnost (A)	8A
IP	IP20
Materijal	Plastika
Broj kanala	1
Snaga (W)	92-288 max.
Raspon detekcije (m)	3
Raspon temperature	-20 ~ +50°C
Sensor translates to Croatian as Sensor.	Da
Napetost izlaza (V)	12/36V-DC

Nomin tension (V)	12/36V-DC
Vanjska upotreba	Da, unutar vodonepropusne kutije
Radni vijek (h)	35000

Product variants

Reference

Attributes



SR-8004DC