


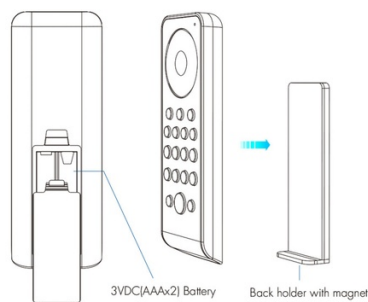

Each zone can switch single color, dual color(WW/CW), RGB, RGBW, or RGB+CCT(WW/CW) RF LED controller.

- Single color
- Dual color(WW/CW)
- RGB
- RGBW
- RGB+CCT


For example, long press **1** key for 2s will set zone 1 to RGB light type.
When remote type change, the green indicator goes on a long time.
Long press **1** key + any of the five key for 2s will set all 8 zones to the same light type correspondingly.

Touch to change current zone brightness, color temperature or RGB color.
Press **BFT**, **CCT** or **RGB** key to switch between brightness wheel, color temp wheel or RGB color wheel.

Single color/CCT/RGB/RGBW/RGB+CCT remote control- 8 zones / 8 scenes - SK-RS10 - Skydance


Ref. SK-RS10-N

Controlerul Skydance wireless, monocrom, CCT, RGB, RGBW, RGB + CCT cu 8 zone permite ajustarea culorii și a intensității luminii cu o roată de atingere și butoane independente. Transmisie RF rapidă și fiabilă de până la 30 de metri. Include suport pentru perete.

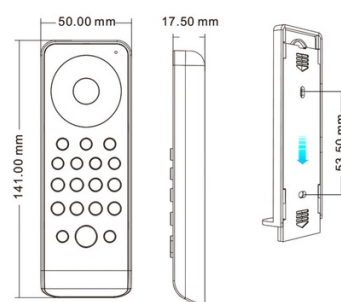

Product data

Înalt	17.5mm
Latime	50mm
Certificatul	CE, ROHS
Conectivitate	RF
Controlul culorii	RGB, RGBW, RGB+CCT
Controlul distanței	30m
Garantie	5 ani
Larg	141mm
Material	Polycarbonat
Interval de temperatură	-30°C ~ +55°C
Tip de baterie	3V (AAA * 2BUC)

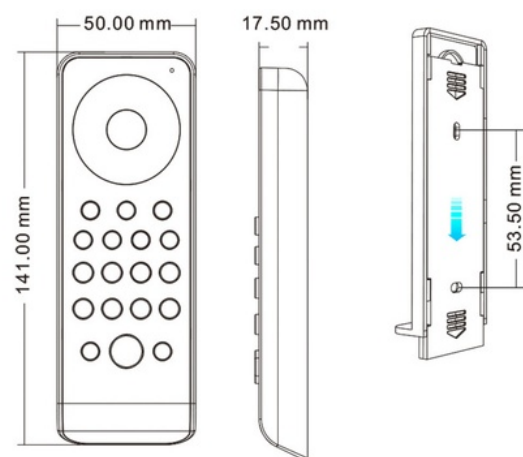

Product variants

Reference

Attributes

SK-RS10-N

