


DMX512 Decoder 12-24V DC - 15A - 1 Channel

Ref. SK-D1-L

DMX512 dekodler je naprava za krmiljenje LED osvetlitve z 1 izhodnim kanalom in maksimalno intenzivnostjo 15A. Je združljiv z vhodnimi napetostmi 12-24V. Uporablja vhodni signal DMX512 in omogoča PWM izhodni signal za doseg gladkega nadzora osvetlitve. Podpira daljinsko upravljanje RDM, omogoča izbor izhodne ločljivosti in prilagoditev frekvence PWM.



Wiring Diagram

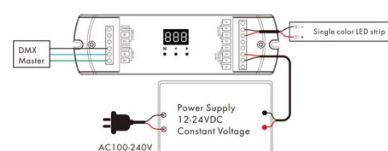

Note:
1. An DMX signal amplifier is needed if more than 32 decoders are connected, or use overlong signal line, signal amplification should not be more than 5 times continuously.
2. If the recoil effect occurs because of longer signal line or bad line quality, please try to connect 0.25W 90-120Ω terminal resistor at the end of each DMX signal line

Product data

Potrdila	CE, ROHS
Konektivnost	DMX
Dimenzije (mm) LxIxH	170 x 50 x 23
Garancija	5 let
NajvečjaIntenzivnost (A)	15
IP	IP20
Število kanalov	1
Izhodna napetost (V)	12 - 24 V
Nomin Spannung (V)	12-24V DC
Zunanja raba	Ne

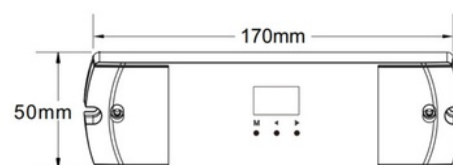

Product variants

Reference

Attributes



SK-D1-L