


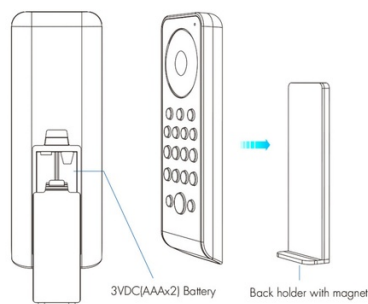

Each zone can match single color: dual color(WW/CW), RGB, RGBW, or RGB+CCT(WW/CW) RF LED controller.

- Single color
- Dual color(WW/CW)
- RGB
- RGBW
- RGB+CCT


For example, long press **1** key for 2s will set zone 1 on RGB light type.
When remote type change, CH-100 green indicator goes on a long time.
Long press **1** key + any of the five key for 2s will set all 8 zones to the same light type correspondingly.

Touch to change current zone brightness, color temperature or RGB color.
Press BFT, CCT or RGB key to switch between brightness wheel, color temp wheel or RGB color wheel.

Single color/CCT/RGB/RGBW/RGB+CCT remote control- 8 zones / 8 scenes - SK-RS10 - Skydance


Ref. SK-RS10-N

Kontrolnik Skydance brezžični daljinski upravljalnik, monokromatski, CCT, RGB, RGBW, RGB + CCT z 8 območji omogoča prilagajanje barve in intenzivnosti svetlobe s pomočjo dotikovalnega kolesa in neodvisnih gumbov. Hitro in zanesljivo RF prenos do 30 metrov. Vključuje stensko montažo.

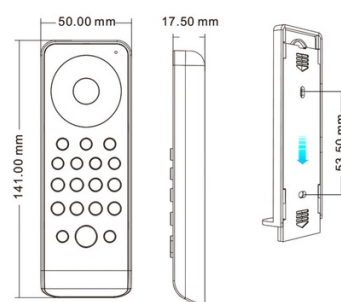

Product data

Visoko	17,5 mm
Širina	50mm
Potrdila	CE, ROHS
Konektivnost	RF
Barvna kontrola	RGB, RGBW, RGB+CCT
Kontrolna razdalja	30m
Garancija	5 let
Dolg	141mm
Material	Polikarbonat
Temperaturni razpon	-30 °C ~ +55 °C
Vrsta baterije	3V (AAA * 2Kos)

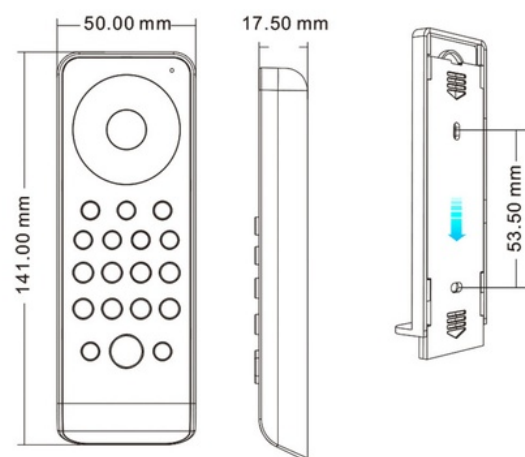

Product variants

Reference

Attributes

SK-RS10-N

