




PIR motion sensor 12-36V-DC 8A 60° IP20

Ref. SR-8004DC

Gibovni senzor in PIR prisotnostni detektor za LED trakove, žarnice in nizkonapetostne svetilke (12-36V). Največje obremenitev 288W (pri 36W) in 8A. 96-288W - 8A 12-36VDC 95x37x20mm ∠ 60° 0-3 meseci PIR IP20

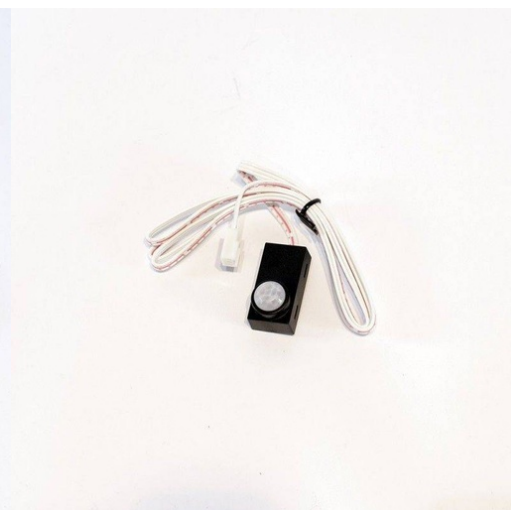

Product data

Kot zaznavanja (°)	60
Potrčila	CE, ROHS
Razred energetske učinkovitosti	A+ (2021)
Konektivnost	PIR
Dimenzije (mm) LxIxh	95x37x20
Frekvenca uporabe	Intenzivno
Garancija	5 let
NajvečjaIntenzivnost (A)	8A
IP	IP20
Material	Plastika
Število kanalov	1
Moč (W)	92-288 maks.
Obseg zaznavanja (m)	3
Temperaturni razpon	-20 ~ +50°C
Senor	Ja
Izhodna napetost (V)	12/36V-DC

Nomin Spannung (V)	12/36V-DC
Zunanja raba	Da, znotraj vodotesne škatle
Življenjska doba (h)	35000

Product variants

Reference

Attributes



SR-8004DC