


DMX512 Decoder 12-24V DC - 15A - 1 Channel

Ref. SK-D1-L

Decodorul DMX512 este un dispozitiv de control al iluminatului LED cu 1 canal de ieșire cu un maximum de intensitate de 15A. Este compatibil cu tensiuni de intrare de 12-24V. Folosește semnalul de intrare DMX512 și oferă un semnal de ieșire PWM pentru a realiza un control al iluminării uniform. Suportă controlul de la distanță RDM, permite selectarea rezoluției de ieșire și ajustarea frecvenței PWM.



Wiring Diagram

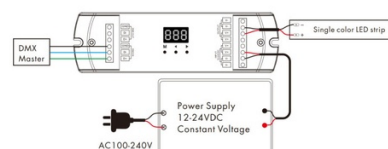

Note:
1. An DMX signal amplifier is needed if more than 32 decoders are connected, or use overlong signal line, signal amplification should not be more than 5 times continuously.
2. If the recoil effect occurs because of longer signal line or bad line quality, please try to connect 0.25W 90-120Ω terminal resistor at the end of each DMX signal line

Product data

Certificatul	CE, ROHS
Conectivitate	DMX
Dimensiuni (mm) LxIxh	170 x 50 x 23
Garantie	5 ani
Intensitate maximă (A)	15
IP	IP20
Număr de canale	1
Tensiune de ieșire (V)	12 - 24 V
Tensiune Nominală (V)	12-24V CC
Utilizare Externă	Nu

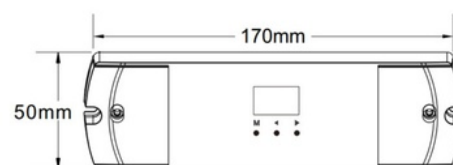

Product variants

Reference

Attributes



SK-D1-L