


DMX512 Decoder 12-24V DC - 5A/channel - 12 Channels - OLED Display

Ref. SK-D12A

DMX512 dekodētājs ir LED apgaismojuma kontroles ierīce ar 12 izvades kanāliem, katram ar maksimālo intensitāti 5A. Tas ir saderīgs ar ieejas spriegumiem 12-24V. Tas iekļauj OLED ekrānu un taustiņus, lai izvēlētos sākotnējo DMX adresi. Izmantojiet DMX512 ievades signālu un nodrošiniet PWM izvades signālu, lai panāktu gludu apgaismojuma kontroli.


WIRING DIAGRAM



- Note:**
1. Connecting with green terminal (DMX AMP) or an extra amplifier will be needed when more than 32 decoders are connected, or use overlong signal line, signal amplification should not be more than 5 times continuously.
 2. If the recoil effect occurs because of longer signal line or bad line quality, please try to connect 0.25W 90-120Ω terminal resistor at the end of each DMX signal line.

Product data

sertifikāti	CE, ROHS
Dimensijas (mm) LxHxW	246 x 116 x 38.5
Garantija	5 gadi
Maksimālā intensitāte (A)	5A/kanāls
IP	IP20
Kanālu skaits	divpadsmit
Izvades spriegums (V)	12 - 24
Nominalā sprieguma (V)	12-24V DC
Ārējais lietojums	Nē

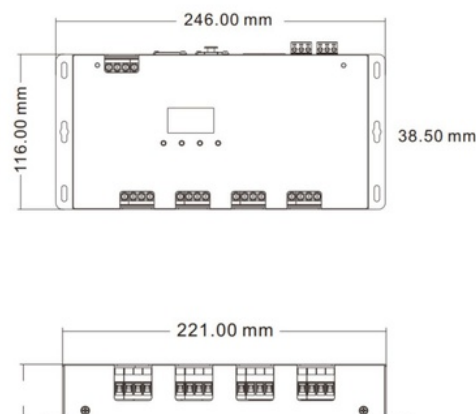

Product variants

Reference

Attributes



SK-D12A