


DMX512 Decoder 12-24V DC - 5A/channel - 12 Channels - OLED Display

Ref. SK-D12A

DMX512-dekoderen er en LED-belysningskontrollenhet med 12 utgangskanaler, hver med en maksimal intensitet på 5A. Den er kompatibel med inngangsspenninger på 12-24V. Den har en OLED-skjerm og taster for å velge den innledende DMX-adressen. Bruk DMX512 inngangssignal og gi et PWM utgangssignal for å oppnå jevn lyskontroll.


WIRING DIAGRAM



- Note:**
1. Connecting with green terminal (DMX AMP) or an extra amplifier will be needed when more than 32 decoders are connected, or use overlong signal line, signal amplification should not be more than 5 times continuously.
 2. If the recoil effect occurs because of longer signal line or bad line quality, please try to connect 0.25W 90-120Ω terminal resistor at the end of each DMX signal line.

Product data

Sertifikater	CE, ROHS
Dimensjoner (mm) LxIxh	246 x 116 x 38,5
Garanti	5 år
Maksimal intensitet (A)	5A/kanel
IP	IP20
Antall kanaler	12
Utgangsspenning (V)	12 - 24
Nominell Spenning (V)	12-24V DC
Utendørs bruk	Nei

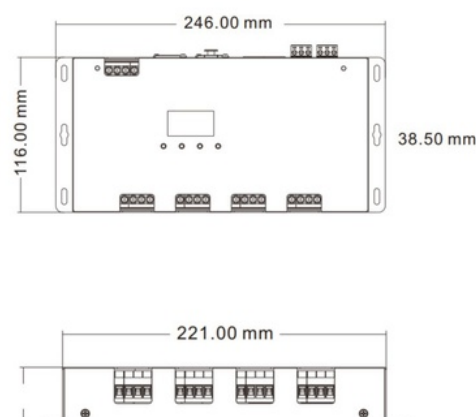

Product variants

Reference

Attributes



SK-D12A