


DMX512 Decoder 12-24V DC - 5A/kanaal - 12 Kanalen - OLED Display

Ref. SK-D12A

De DMX512 Decoderaar is een LED-verlichtingscontroller met 12 uitgangskanalen, elk met een maximale intensiteit van 5A. Het is compatibel met ingangsvoltes van 12-24V. Bevat een OLED-scherm en toetsen om de begin DMX-adres te selecteren. Gebruik het DMX512-ingangssignaal en levert een PWM-uitgangssignaal om een soepele controle van de verlichting te bereiken.


WIRING DIAGRAM



- Note:**
1. Connecting with green terminal (DMX AMP) or an extra amplifier will be needed when more than 32 decoders are connected, or use overlong signal line, signal amplification should not be more than 5 times continuously.
 2. If the recoil effect occurs because of longer signal line or bad line quality, please try to connect 0.25W 90-120Ω terminal resistor at the end of each DMX signal line.

Product data

Certificaten	CE, ROHS
Afmetingen (mm) LxIxh	246 x 116 x 38.5
Garantie	5 jaar
Maximale intensiteit (A)	5A/kanaal
IP	IP20
Aantal kanalen	12
Uitgangsspanning (V)	12 - 24
Nominale Spanning (V)	12-24V DC
Buiten gebruik	Nee

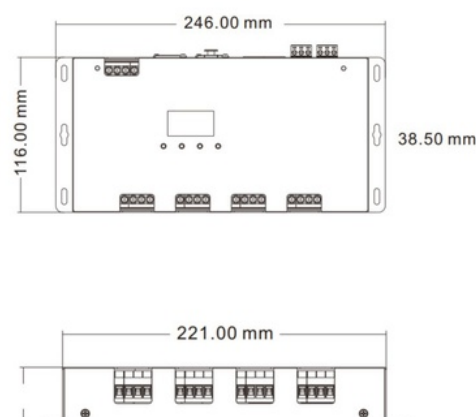

Product variants

Reference	Attributes
SK-D12A	