


DMX512 Decoder 12-24V DC - 5A/channel - 12 Channels - OLED Display

Ref. SK-D12A

Decodorul DMX512 este un dispozitiv de control pentru iluminatul LED, având 12 canale de ieșire, fiecare cu o intensitate maximă de 5A. Este compatibil cu tensiuni de intrare de 12-24V. Incorporează un ecran OLED și taste pentru a selecta adresa DMX inițială. Utilizați semnalul de intrare DMX512 și oferiți un semnal de ieșire PWM pentru a realiza un control al iluminării fluid.

WIRING DIAGRAM




Note:

1. Connecting with green terminal (DMX AMP) or an extra amplifier will be needed when more than 32 decoders are connected, or use overlong signal line, signal amplification should not be more than 5 times continuously.
2. If the recoil effect occurs because of longer signal line or bad line quality, please try to connect 0.25W 90-120Ω terminal resistor at the end of each DMX signal line.

Product data

Certificatul	CE, ROHS
Dimensiuni (mm) LxIxh	246 x 116 x 38.5
Garantie	5 ani
Intensitate maximă (A)	5A/canal
IP	IP20
Număr de canale	12
Tensiune de ieșire (V)	12 - 24
Tensiune Nominală (V)	12-24V CC
Utilizare Externă	Nu

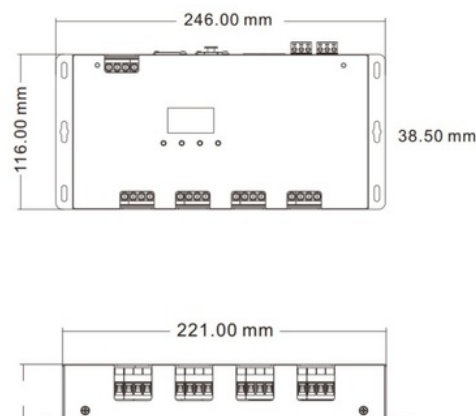

Product variants

Reference

Attributes



SK-D12A